



## MCB Series Time Relays

MCB series time relays are designed to control devices in desired time interval. They offer a number of different timing functions with adjustable time ranges.

Time relays are used in automation machines, building lighting and food & agriculture industry.



- DIN rail mounting
- 12-240 VAC/DC or 24-240 VAC/DC wide operating ranges
- Adjustable and selectable timing functions
- IP20 terminals protection class
- IP40 housing protection class (MCB-15 and MCB-20)
- 3 digits LCD screen (MCB-25)
- 1 x 8A CO relay output



## PRODUCT SELECTION TABLE

Product Code	Time	ON Delay	OFF Delay	OFF Delay with Control Input	ON Delay with Control Input	Single shot leading edge with control input	Single shot trailing edge with control input	Symmetric Flasher	Control Input	ON Delay with Control Input Leading Edge	OFF Delay with Control Input Trailing Edge	Single Shot Leading and Trailing Edge with Control Input	ON Flasher	OFF Flasher	Pcs / Box
MCB-7	Time Relay	0,1 sec - 30 Hours	•	•											28
MCB-8	Time Relay (precise contr)	0,1 sec - 999 min	•	•											28
MCB-9	Time Relay	0,5 sec - 30 Hours	•	•									•	•	28
MCB-15	Multi-function T. Relay	0,05 sec - 100 Hours	•	•	•			•	•						10
MCB-20	Multi-function T. Relay	0,1 sec - 100 Hours	•	•	•	•	•	•	•						10
MCB-25	Multi-function T. Relay	0,1 sec - 999 Hours	•	•	•			•	•	•		•	•	•	20
MCB-30	Time Relay	2-30 sec	•												28
MCB-60	Time Relay	4-60 sec	•												28

SPECIFICATIONS	MCB-15	MCB-20	MCB-25	MCB-7/8/9	MCB-30	MCB-60
<b>ENCLOSURE</b>						
Dimensions	PK27			PK22		
Protection Class	IP40			PK20		
Weight	0,1kg/pcs					
<b>SUPPLY</b>						
Operating Voltage	24-240 VAC/DC	12-240 VAC/DC	24-240 VAC/DC		12-240 VAC/DC	
Operating Frequency						
Power Consumption	< 4 VA			< 8 VA		
<b>OUTPUT</b>						
Repeat Accuracy	±5msec.		±%0.5			
Reset Time	100 msec.		< 150 msec.			
Output Contact	1 CO; 8A, 2000 VA, cosφ=1					
<b>AMBIENT CONDITIONS</b>						
Ambient Temperature; Humidity	-5 / +55°C ; % 85		-10 / +55°C ; % 93		-5 / +55°C ; % 85	
<b>CONNECTIONS</b>						
Mounting	Rail Mounting, Terminals with Screw					
Connection Types	Single phase 2 wires					

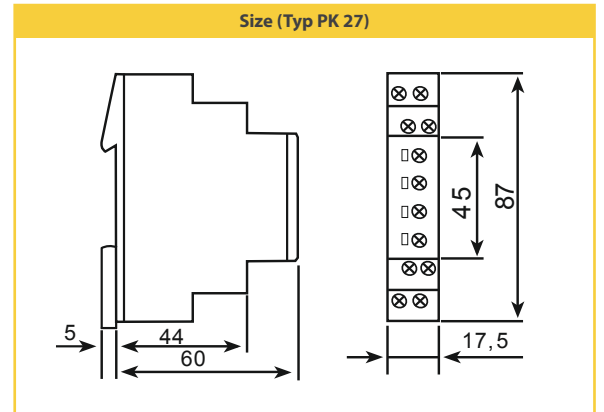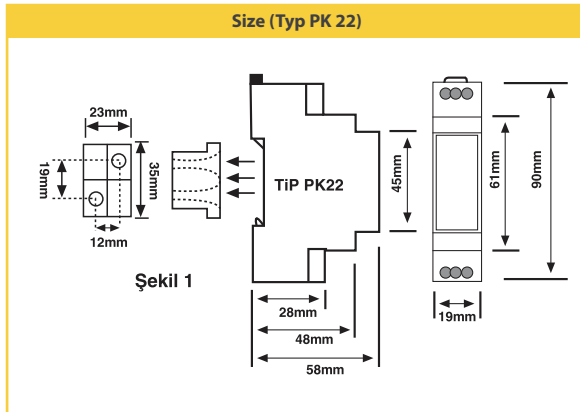

### HEADQUARTERS

Address: Dudullu OSB; 1. Cadde; No: 23 34776 Ümraniye - İSTANBUL / TÜRKİYE Tel: +90 216 313 01 10 Fax: +90 216 314 16 15 Sales Fax: +90 216 365 71 71  
E-mail: impex@entes.com.tr Web: www.entes.com.tr E-bulletin membership: ebulten@entes.com.tr Coordinates: 40,995852 N, 29,178398 E

### INTERNATIONAL BRANCH OFFICES

İSTANBUL : impex@entes.com.tr Tel: +90 216 313 01 10 Fax: +90 216 314 16 15  
GERMANY : info@enteselektronik.com Tel: +49 (0) 7022 6047415  
NETHERLANDS : info@entes.eu Tel: +31 412 - 644319  
GREECE : infohellas@entes.eu Tel: +30 2310 706999 +30 2310 707296

© ENTES Elektronik Cihazlar İmalat ve Ticaret A.Ş.

